THEREC CORPORATION LTD.



Side Channel / Ring / Regenerative Blower

* FPZ BLOWER TECHNOLOGY

THE WORL'S LARGEST PRODUCER



MS Series /Single impeller ,Single stage
Flow rate Up to 1,234 m³/hr
Pressure up to +500 mBar
Vacuum down to -375 mBar
Material in Aluminium casting
ATEX explosion proof version is available



MD Series /Single impeller ,Double stage
Flow rate Up to 473 m³/hr
Pressure up to +750 mBar
Vacuum down to -500 mBar
Material in Aluminium casting
ATEX explosion proof version is available



TS Series /Twin impeller ,Single stage
Flow rate Up to 1,985 m³/hr
Pressure up to +450 mBar
Vacuum down to -350 mBar
Material in Aluminium casting
ATEX explosion proof version is available



TD Series /Twin impeller ,Double stage
Flow rate Up to 1,007 m³/hr
Pressure up to +650 mBar
Vacuum down to -500 mBar
Material in Aluminium casting
ATEX explosion proof version is available





Positive displacement / Roots Blower



THE ORIGINAL ROOTS BLOWER FROM USA

Howden

URAI Series / Bi lobe impeller
Flow rate Up to 4,026 m³/hr
Pressure up to +1,034 mBar
Vacuum down to -539 mBar
Material in Cast iron
GAS & Explosion proof version is available

RAM Series / Bi lobe impeller
Flow rate Up to 6,030 m³/hr
Pressure up to +1,240 mBar
Vacuum down to -539 mBar
Material in Cast iron
GAS & Explosion proof version is available

RAM-VJ Series / Bi lobe impeller
Water jet Vacuum pump
Flow rate Up to 4,250 m³/hr
Vacuum down to –813 mBar
Material in Cast iron

RBTM Series / Bi lobe impeller
Bulk Truck Blower
Flow rate Up to 4,250 m³/hr
Pressure up to +1,241 mBar
Material in Cast iron

Tri-RAM Series / Tri lobe impeller Flow rate Up to 82,850 m³/hr Pressure up to +1,000 mBar Material in Cast iron

RAS ,RGS Series / Bi lobe impeller
Flow rate Up to 73,440 m³/hr
Pressure up to +2,413 mBar
Vacuum down to -539 mBar
Material in Cast iron
GAS & Explosion proof version is available

Turbotron / Peripheral Toroidal Blower



Flow rate Up to 1,900 m³/hr
Pressure up to +1,000 mBar
Vacuum down to -450 mBar
Material in Aluminium casting
ATEX explosion proof and Food grade
sanitary version is available

Centrifugal Blower



Flow rate Up to 2,800 m³/hr
Pressure up to +1,500 mmAq
Material in Aluminium casting
ATEX explosion proof and Bio gas
specially design version is available

Nota / Note:

94/9/CE (ATEX).

Disponibile anche in esecuzione per Zone 1 e 2, 21 e 22 della Direttiva Europea

Also manufactured in conformity to the requirements of the European Directive 94/9/EC (ATEX) for Zones 1 and 2, 21 and 22.

Sliding vane Biogas compressor



Oil lubricant biogas compressor
Flow rate Up to 5,000 m³/hr
Pressure up to +4.0 BarG
Material in Cast iron with Kevlar special
reinforce blade
ATEX explosion proof for Bio gas digester
tank string purpose

Sliding vane Vacuum pump



Oil & Oil free lubricant Vacuum pump Flow rate Up to 300 m³/hr Vacuum down to -990 mBar

MAPRO INTERNATIONAL S.p.A.

Via E.Fermi,3 20834 NOVA MILANESE (MB) - Italia Fax: +39 0362 450342 Tel. +39 0362 366356 web: www.maproint.com - e-mail: mapro@maproint.com

www.thereccorp.com

Multi Stage Air & Gas Centrifugal Blower



Flow rate Up to 4,500 m³/hr Pressure up to 10,000 mmAq (1.0 bar) Material in cast aluminium Stainless steel shaft is available on option **Explosion proof, ATEX version. is available** Special seal for gas tight version Internal special coating for corrosive gas & **Biogas**





Flow rate Up to 400,000 m³/hr Pressure up to 2,800 mmAq Material in Carbon & Stainless steel Stainless steel shaft is available on option Explosion proof version, is available Internal special coating for corrosive gas & **Biogas**

Industrial Type Axial flow fan



SAVIO s.r.l.



Flow rate Up to 150,000 m³/hr Pressure up to 165 mmAq Material in Carbon & Stainless steel High temperature version is available **Extraction towers for roofs**



In-line fans with removable bodies and small size for high temperatures (250°C) designed to work interleaved in chimney ducts
Flow rate Up to 2,900 m³/hr
High temperature option, up to 250 degree C



Fan designed with the most advanced technology & experience to withstand extreme working condition in oven, drier and other application with high temperature and humidity

Flow rate Up to 68,000 m³/hr High temperature option, up to 150 degree C



Centrifugal single-inlet, medium & highpressure fans with casing and impeller made from cast aluminium Flow rate Up to 2,300 m³/hr Pressure up to 945 mmAq High temperature option, up to 250 degree C



Centrifugal single-inlet, medium-pressure fans with casing and straight-blade impeller made from cast aluminium to transport dust and solids

Flow rate Up to 3,115 m³/hr
Pressure up to 945 mmAq
High temperature option, up to 250 degree C




Plastic anticorrosive centrifugal fans with and without ATEX certification
Flow rate Up to 4,500 m³/hr
High temperature option, up to 400 degree C





Smoke extract roof fans 400°C/2h centrifugal roof fans with horizontal or vertical outlet air Flow rate Up 10,429 m³/hr High temperature option, up to 400 degree C

Explosive atmospheres ATEX fans High efficiency "Efficient Work" fans





Blower Accessories and Related Equipment



Pressure and Vacuum relief valve Size 1.0,2.0,3.0 & 4.0 inches Flow rate Up to 2,000 m³/hr Pressure up to 600 mBar Vacuum down to 450 mBar

Flow Reversing Valve ,Size 2.0 & 3.0 inches Pneumatic and Electrical control, 24 VDC and 220 VAC



Bio gas Flow Meter size, 1.0" to 16.0" with Flow computer controller & System Flow measuring from 0.2 to 16,000 m³/hr





Air and Gas diffuser for waste water treatment aeration system **Material in Polyurethane and EPDM**



PRO2AIR® Pre-PUR 602






Our own manufacturing Equipment



Acoustic enclosure and Silencer for high pressure blower noise control Noised Reduction level from 5 dBA to 20 dBa Material in Carbon and Stainless Steel

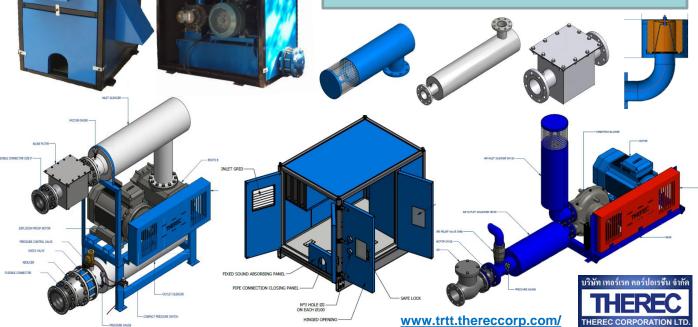

Engineering design package set



Roots Blower Package for waste water treatment aeration system / Thai Union Frozen Product (Public) Co.,Ltd.



Roots Blower Package with filter and header / in SUS 304 / for waste water treatment plant Biogas boosting set for Electrical power generator **Ubol Ethanol Bio Power Co,Ltd.**



pneumatic conveying system The Siam Cement (public) Co.,Ltd.



Ring Blower Package for pneumatic conveying system United Food Co.,Ltd.



Multi stage centrifugal Blower Biogas boosting set for Electrical power generator **Ekarat Bio Power Co, Ltd.**



Service hot line call: 02 893 9003-4

www.srv.thereccorp.com

On site Installation Service & Commissioning













www.thereccorp.com



Therec Corporation Ltd.

Tel: (662) 893 9003-4

Fax: (662) 893 9005 88 Soi Karnjanapisek 4/2 Karnjanapisek Rd. Bangbon Bangkok 10150 Thailand Food grade product TRC 001 2017